


VISIBILITY OBSTRUCTION TRIANGLES FOR ROUNDABOUTS

1. SHALL FOLLOW CURRENT AASHTO RECOMMENDATIONS
2. BE APPROVED BY THE CITY ENGINEER
 - 2.1. SUBMIT DRAWINGS TO THE CITY ENGINEERING DEPARTMENT FOR EACH ROUNDABOUT DESIGN.

NOTES:

1. SIGNS, FENCES, WALLS, UTILITY BOXES, STRUCTURES AND VEGETATION OVER 2' 6" IN HEIGHT SHALL NOT BE PERMITTED WITHIN THE VISIBILITY TRIANGLE.
 - A. FENCE THAT DOES NOT OBSTRUCT MORE THAN 20% OF THE VISIBILITY (SUCH AS CHAIN LINK) MAY BE ALLOWED WITH CITY ENGINEER APPROVAL.
2. TREES ARE PERMITTED WITHIN THE VISIBILITY TRIANGLE PROVIDED:
 - A. NO LIMBS, LEAVES OR OTHER FOLIAGE ABOVE 2' 6" OR BELOW 8' ARE PERMITTED.
 - B. TREES ARE PLANTED SO AS NOT TO OBSTRUCT MORE THAN 20% OF THE VISIBILITY WHEN COMBINED WITH OTHER OBSTRUCTIONS PRESENT.

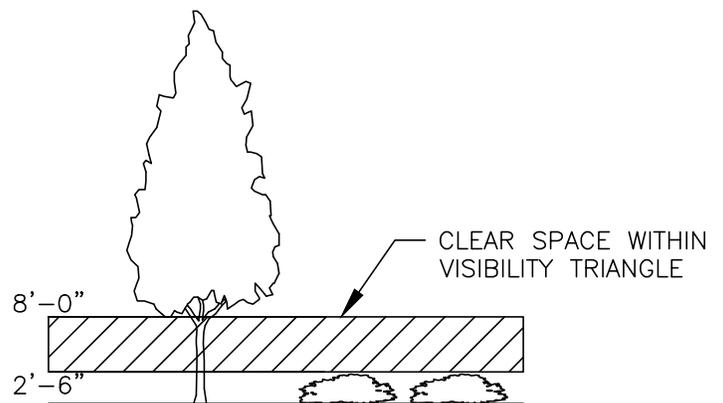

Engineering Division

Visibility Obstruction Triangle

Approved By
City Engineer
Kevin J. Slovarp

Adopted: 06/1987
Revised: 05/05/2017

STD - 711