


D&L A-1171 LOCKABLE OR APPROVED EQUIVALENT

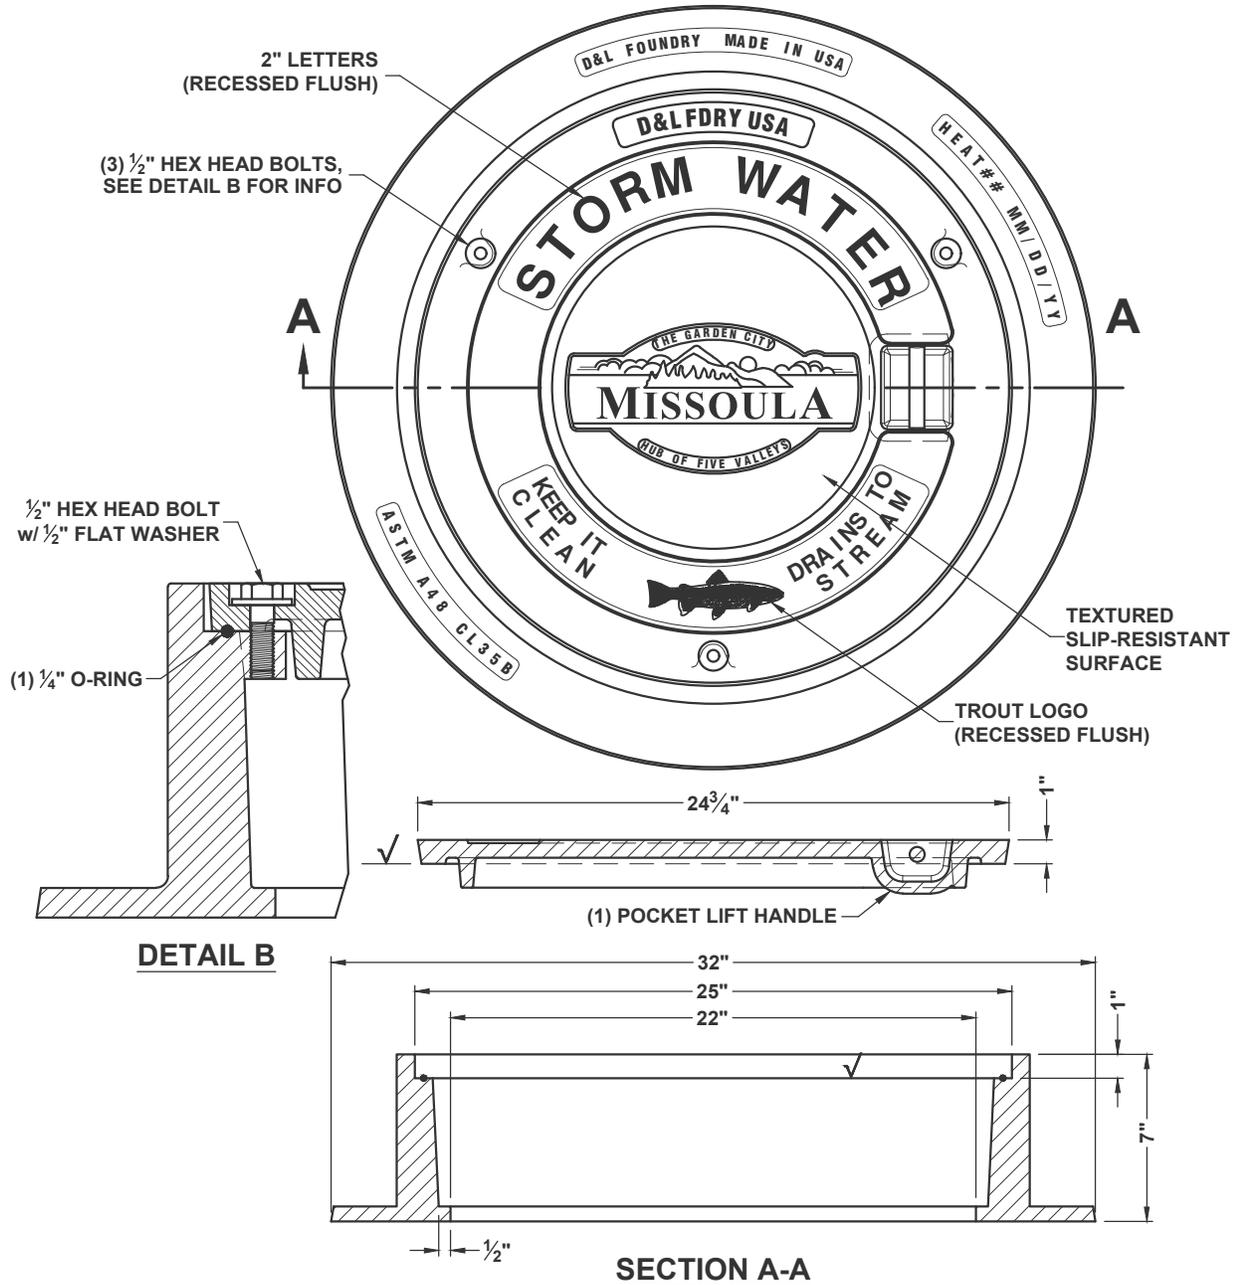

PRODUCT NUMBER:	MATERIAL TYPE:
COVER: A-1171	GRAY IRON: ASTM A-48 CL 35B
RING: A-1171-R1	GRAY IRON: ASTM A-48 CL 35B

GENERAL NOTES:

1. FOR USE WHEN THE MANHOLE CAN BECOME PRESSURIZED.
2. FOR CITY-OWNED INFRASTRUCTURE ONLY. FOR PRIVATE STRUCTURES WITHIN THE RIGHT-OF-WAY PROVIDE A TEXTURED SLIP RESISTANT LID WITHOUT CITY LOGO – MUST HAVE "STORM WATER" ON LID.
3. PROVIDE LIDS AND RINGS THAT MEET AASHTO 306 HS20 LOADING RATING OR HIGHER.
4. ANGLED GRADE RINGS SHALL BE USED TO MATCH LID TO CROSS SLOPE AND RUNNING SLOPE OF THE ROAD
5. 4-INCH MANHOLE RING MAY BE USED IN LIEU OF A 7" RING ONLY WITH PRIOR APPROVAL FROM CITY ENGINEERING.



Engineering Division

Storm Water Lockable Lid and Frame

Approved By
Utility Engineer
Andy Schultz, PE

Revised: 09/28/2020

STD - 605