



POURED IN PLACE (DOG-HOUSE) MANHOLE BASE

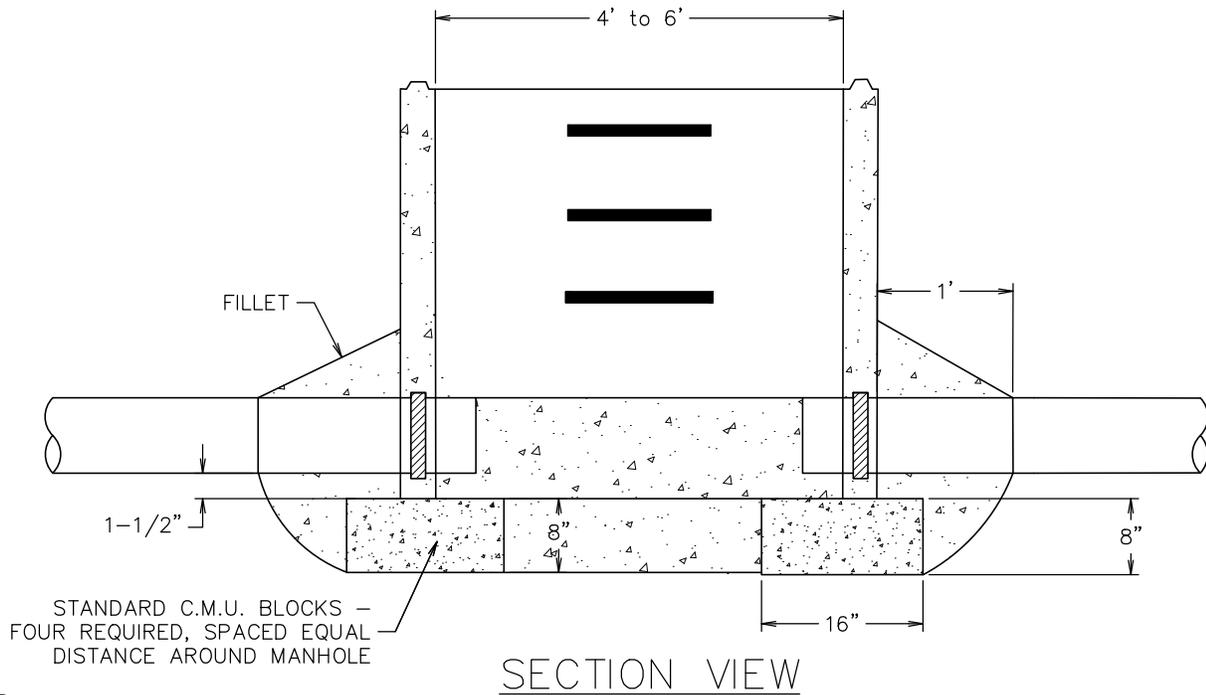

NOTES

1. BASE AND FILL CONCRETE MAY BE POURED MONOLITHICALLY.
2. ONE-HALF (1/2") INCH SPACING MAY BE OMITTED WHEN BASE AND FILL CONCRETE ARE POURED MONOLITHICALLY.

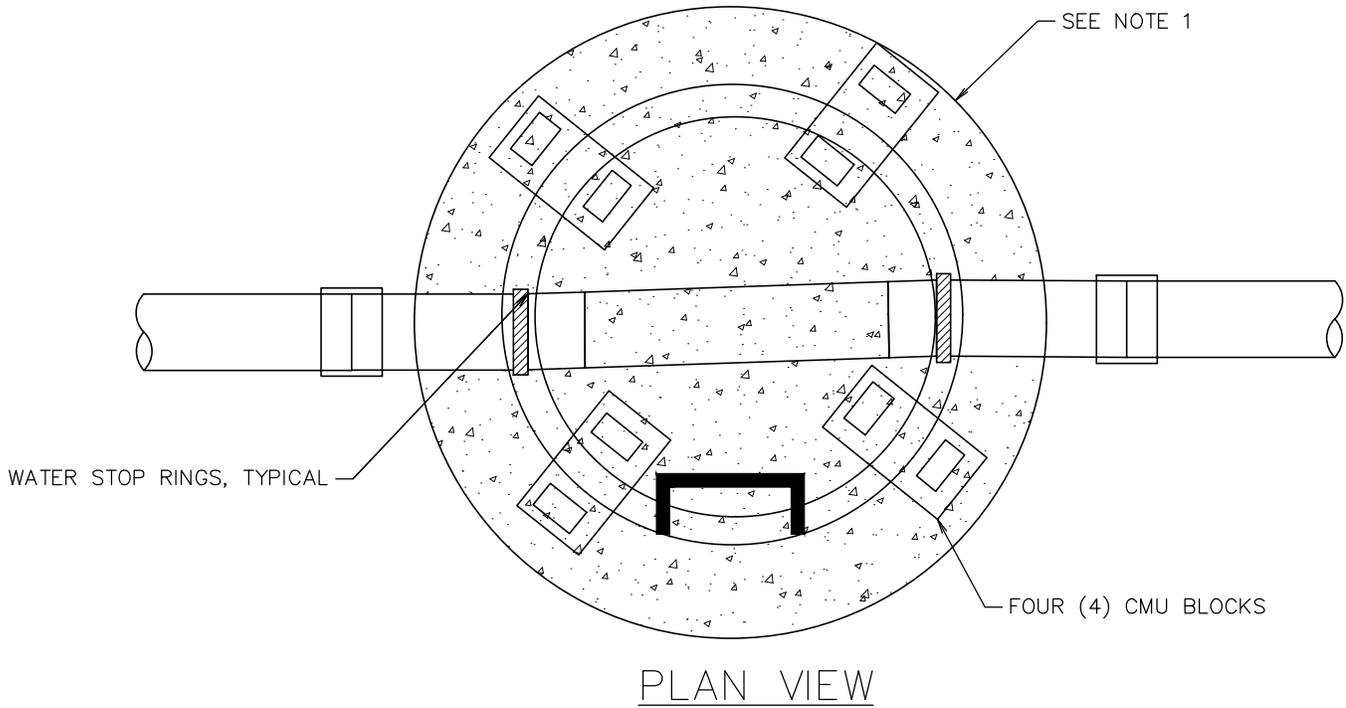

Engineering Division

Storm Water Manhole - Dog House Base (Sheet 2 of 3)

AS

Approved By
Utility Engineer
Andy Schultz, PE

Revised: 09/28/2020

STD - 612-2